


# Cuplaje Universale Seria 1200-L "Liberty"



## Detalii tehnice

- Fonta ductila, calitate GGG-50.
- Acoperire cu vopsea EPOXY (150 microni).
- Se pot conecta intre diferite tipuri de tevi si diametre diferite.
- Greutatea scazuta si manevrabilitatea acestei game de produse ofera libertate de miscare operatorilor.
- Deflectie unghiulara +/- 6°.

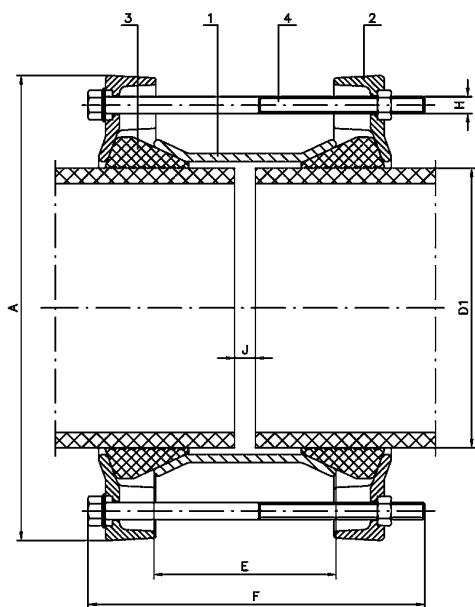

REF.	D1 (Min)	D2 (Max)	E	F	A	J (Min)	J (Max)	H	Greutate kg
1200-A / L	47	60	100	190	169	10	40	M12 x 180/90	2,8
1200 / L	57	72	106	210	195	10	45	M12 x 200/90	4,1
1201 / L	68	85	106	210	207	10	45	M12 x 200/90	4,4
1202 / L	84	106	106	210	224	10	45	M12 x 200/90	5,1
1203 / L	103	116	106	210	250	10	45	M12 x 200/90	6,7
1204 / L	108	130	106	230	250	10	45	M12 x 220/100	7,1
1205 / L	128	146	106	230	276	10	45	M12 x 220/100	7,7
1206 / L	134	155	106	230	276	10	45	M12 x 220/100	7,6
1207 / L	153	175	106	230	304	10	45	M12 x 220/100	8,6
1208 / L	165	185	106	230	304	10	45	M12 x 220/100	8,1
1209 / L	184	207	130	260	330	10	70	M12 x 250/130	10,7
1210 / L	208	225	130	260	348	10	70	M12 x 250/130	11,3
1210-A / L	218	236	150	260	359	10	90	M12 x 250/130	14,0
1211 / L	222	250	130	260	373	10	70	M12 x 250/130	12,2
1211-A / L	246	270	150	300	394	10	90	M12 x 290/130	17,1
1212 / L	264	284	130	260	407	10	70	M12 x 250/130	17,1
1212-A / L	282	306	150	300	433	10	90	M12 x 290/130	20,0
1213 / L	305	326	130	260	451	10	70	M12 x 250/130	20,5
1213-A / L	315	335	150	300	463	10	90	M12 x 290/130	23,1
1213-B / L	334	355	150	300	483	10	90	M12 x 290/130	22,5
1214 / L	360	386	130	260	510	10	70	M12 x 250/130	23,8
1214-A / L	386	410	150	300	538	10	90	M12 x 290/130	28,1
1215 / L	408	435	130	260	559	10	70	M12 x 250/130	28,0
1216 / L	425	448	150	300	584	10	90	M12 x 290/130	34,1
1216 / LE	438	458	150	300	584	10	90	M12 x 290/130	34,1
1217 / L	465	490	180	330	628	10	120	M12 x 320/130	39,6
1217 / LE	480	500	180	330	628	10	120	M12 x 320/130	39,6

### COMPONENTA

	Nume	Material	Acoperire
1	Corp central	GGG-50	EPOXY RAL-5015
2	Mufe de capat	GGG-50	EPOXY RAL-5015
3	Garnitura inchidere	EPDM	
4	Suruburi	Grupa 6.8	GEOMET

MATERIAL: GGG-50

Utilizare: Fonta, otel, PVC-U / -B0, azbociment.



## Duna Armatura Bucuresti

Tel: +40 213 170 246 Fax: +40 213 170 248

mail: [office@duna-armatura.ro](mailto:office@duna-armatura.ro)


[www.duna-armatura.ro](http://www.duna-armatura.ro)

# Adaptor flansa Universal Seria 2200-L "Liberty"



## Detalii tehnice

- Fonta ductila, calitate GGG-50.
- Acoperire cu vopsea EPOXY (150 microni).
- Se pot conecta intre diferite tipuri de tevi si diametre diferite..
- Se poate folosi ca si compensator de montaj.
- Potrivit pentru ISO, DIN (PN-10/16), BS, ANSI 150 lb, BSTD.
- Greutatea scazuta si manevrabilitatea acestei game de produse ofera libertate de miscare operatorilor..
- Presiunea maxima de lucru 16 bar.
- Deflectie unghiulara +/-6°.

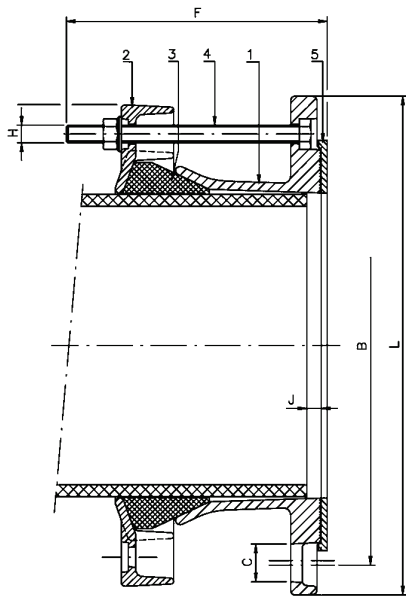

### COMPONENTA

	Nume	Material	Acoperire
1	Corp central	GGG-50	EPOXY RAL-5015
2	Mufa capat	GGG-50	EPOXY RAL-5015
3	Suruburi	Quality 6.8	GEOMET
4	Garnitura inchidere	EPDM	
5	Garnitura plata	EPDM	

Ref. 2211/L si superioare sunt echipate cu garnitura plata.  
Ref. 2214-A va rugam specificati PN10 sau PN16

REF.	DN	D1 (Min)	D1 (Max)	L	B	C	F	J (Min)	J (Max)	H	Greutate kg
2200-A / L	40 / 50	47	60	165	100/125	19	140	10	45	M12 x 130	4
2200 / L	50 / 65	57	72	194	114/147	19	140	10	55	M12 x 130	5
2201 / L	50 / 65	68	85	207	125/160	19	140	15	55	M12 x 130	6
2202 / L	65 / 80 / 100	84	106	224	146/190	19	140	10	55	M12 x 130	5,8
2203 / L	100 / 125	103	116	250	178/216	19	140	10	55	M12 x 130	7,8
2204 / L	100 / 125	108	130	250	178/216	19	150	10	55	M12 x 140	7
2205 / L	125 / 150	128	146	286	210/242	22	140	10	55	M12 x 130	9,6
2206 / L	125 / 150	134	155	286	210/242	22	150	10	55	M12 x 140	9,1
2207 / L	150 / 175 / 200	153	175	340	237/298	23	140	10	55	M12 x 130	10,7
2208 / L	150 / 175 / 200	165	185	340	237/298	23	150	10	55	M12 x 140	11,2
2209 / L	175 / 200	184	207	342	290/301	23	170	10	70	M12 x 160	13,6
2210 / L	200	208	225	348	295/301	23	170	10	70	M12 x 160	14,5
2210-A / L	200	218	236	348	295	23	170	15	70	M12 x 160	13,6
2211 / L	200	222	250	370	295	23	170	28	70	M12 x 160	14,6
2211-A / L	250	246	270	406	350/364	27	170	10	80	M12 x 160	18,4
2212 / L	250	264	284	406	350/364	27	170	10	70	M12 x 160	18,4
2212-A / L	250	282	306	435	355	26	190	28	80	M12 x 180	21,9
2213 / L	300	305	326	482	400/434	27	170	10	70	M12 x 160	23
2213-A / L	300	315	335	482	400/434	27	170	10	80	M12 x 160	27,4
2213-B / L	300	334	355	485	405/440	27	170	78	80	M12 x 160	28
2213-C / L	300	360	386	498	404/440	27	260	83	155	M12 x 250	36,4
2214 / L	350	360	386	533	460/479	27	170	10	70	M12 x 160	25
2214-A / L	350	386	410	540	470	26	190	10	80	M12 x 180	28,1
2215 / L	400	408	435	596	515/542	30	170	10	70	M12 x 160	28,3
2216 / L	400	425	448	596	515/542	30	190	10	80	M12 x 180	29,8
2216 / LE	400	438	458	596	515/542	30	190	10	80	M12 x 180	29,8
2217 / L	400	465	490	630	525/570	30	300	83	155	M12 x 290	44,3
2217 / LE	400	480	500	630	525/570	30	300	83	155	M12 x 290	44,3

• Alte dimensiuni la cerere.

MATERIAL: GGG-50

Utilizare: Fonta, otel, PVC-U / -B0, azbociment.



## Duna Armatura Bucuresti

Tel: +40 213 170 246 Fax: +40 213 170 248

mail: [office@duna-armatura.ro](mailto:office@duna-armatura.ro)

[www.duna-armatura.ro](http://www.duna-armatura.ro)