



60 SAINT-CREPIN-IBOUVILLERS
(France)
Quality System ISO 9001
certified by third party

ACCESS COVERS & FRAMES

SOLOSELF S F900 NF

SOLO COVER

Class F900
EN124 : 1994

SG Iron 500-7
ISO 1083 / EN1563

DESIGN FEATURES :

- ☞ SG Iron to ISO 1083 / EN1563, Grade 500-7.
- *Design load :*
☞ 900 kN to EN124, place of installation Group 6 : areas imposing particularly high wheel loads, e.g. aircraft pavements, and lower groups.
- *Coating :*
Non toxic waterbased black paint.
- *Product Certification :*
NF Mark
This quality mark certifies conformity to the 'NF' regulation 110 and furthermore those feature highlighted (☞) are also certified for performance by the authorising body AFNOR CERTIFICATION,
11, avenue Francis de Pressensé
F-93571 La Plaine Saint-Denis Cedex.

SPECIAL FEATURES :

- *Mass :*
Cover : 67 Kg
Product total : 113 kg.
- *Surface finish :*
Solid top cover with "Square Tessellation" anti-slip surface.
- *Seatings ensure stability and noise reduction :*
☞ Wide flat neoprene insert® stuck on the cover.
- *Frame bearing pressure :*
☞ $p \leq 7.5 \text{ N/mm}^2$.
- *Securing of cover/grating within frame :*
☞ with sufficient mass per unit area.
- *Frame type :*
☞ Depth of insertion : $e = 98 \text{ mm}$.
Circular monoblock as cast.
The frame incorporates prising slot(s) to lift the cover.
☞ Depth : 190 mm
- *Cover type :*
C : External diameter : 650 mm.
- *Hinge :*
Secured (Cover block at 90° preventing accidental closure).
Identification mark : "S".
☞ Opening angle : $\approx 115^\circ$.

OPTION(S) :


- *Badging :* Please enquire.
Badging space depending on size of cover.

CIVIL ENGINEERING :


- *Anchoring :*
Selflevel type.
Use exclusively hot asphalt.
ATTENTION : The frame must not be seated on the concrete.
See installation instructions : ndp35.

HANDLING :

The cover can be removed from the 90° angle.
Cover provided with a keyhole and prising slot in order to allow the handling by means of a pick or a hook.
The cover is provided with one keyway to allow removal by means of a hook or pick.

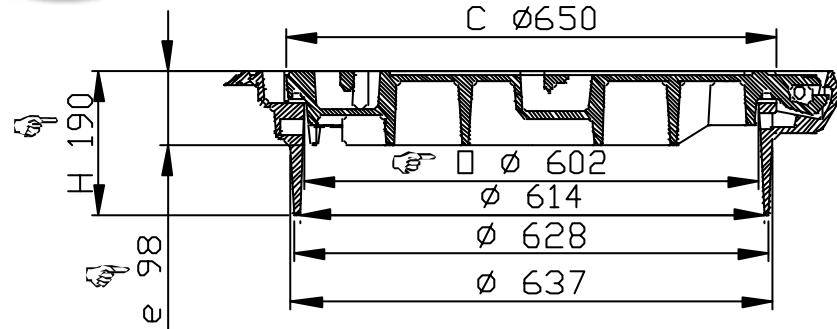

FT_524947

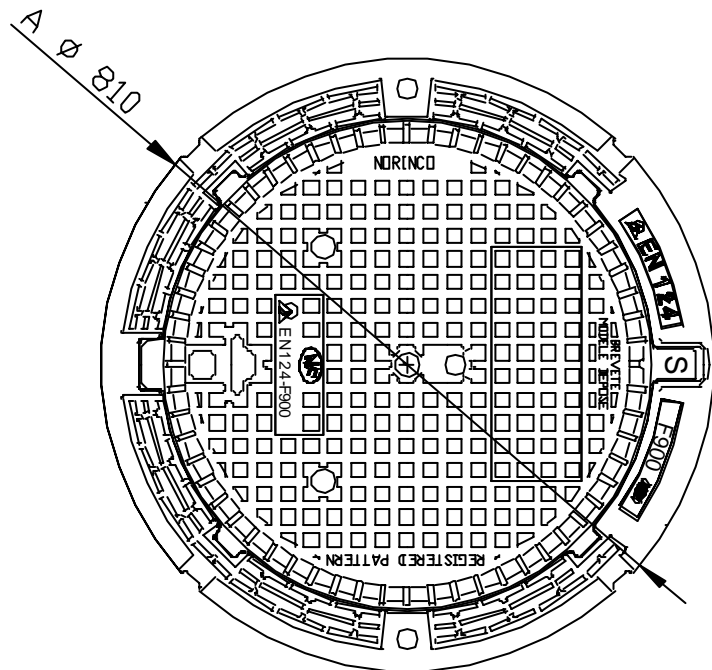

- (☞) Certified characteristics.
- Weights (kg), dimensions (inches) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
Property of NORFOND
Not to be used without its permission.

<http://www.norinco.fr>
FR : NORINCO FRANCE - NORFOND
IT : NORINCO ITALIA
SP : NORINCO IBERICA
GB : NORINCO UK
BR : NORINCO DO BRASIL
DE : NORINCO DEUTSCHLAND
NORINCO SINGAPOUR _____ NORLONG

Data sheet :
FT_524947
Date updated :
16.03.2006
Printed : 17.03.2006