



Fittings with flanged connection

Flanged fittings are the most common fittings for critical nodes in pipe networks. Highest quality and traceability of the products are particularly important.

Choose manufacturers that also produce less common (B and C) items as part of their product range and use geometries common in Europe.

Recommendations for your tenders:

- Frischhut brand or equivalent
- Flange according to EN 1092-2
- Material according to DIN EN 545
- Certification for drinking water
- Corrosion protection through epoxy resin powder coating with BPA-reduced powder (R8) inside and outside according to quality assurance RAL-GZ 662 - GSK

- External monitoring by accredited, neutral testing institute
- Cast-on marking „FGR“ including membership number as proof of manufacturer



F
flanged spigot



FFG
double flanged pipe



FFS
double flanged pipe custom
made with welded flanges




FFK 11° 22° 30° 45°
double flanged pipe bend



N
flanged 90° duckfoot bend



NI 3x2''
flanged 90° duckfoot bend
with bosses

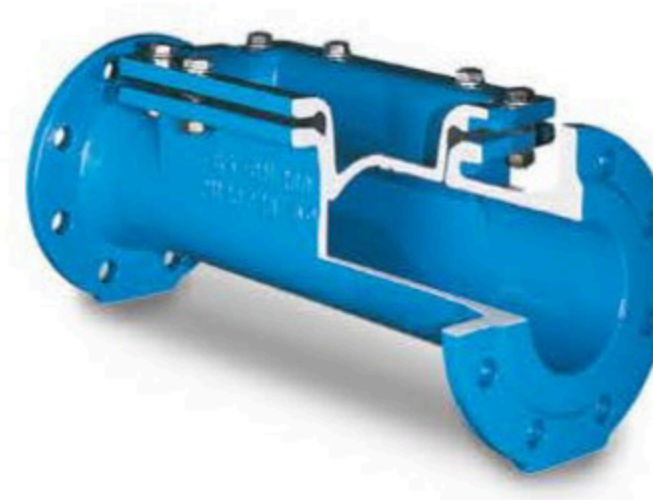

Hatch box
with flanged connection
for cleaning and inspection



Q
double flanged elbow



T
all flanged tee



TT
all flanged cross tee



FFR
double flanged reducer



FFRe
double flanged reducer
eccentric



X
blind flange



XI
blind flange with internal
thread



XIN
blind flange with internal
thread and boss



Bolted puddle flange
for ductile iron pipes



Flap check valve
for the protection of
drainage pipes



Q
double flanged elbow
with two rotatable flanges



Rotable Flange



N
flanged 90° duckfoot bend
with two rotatable flanges