



KS fittings for PVC and PE pipes

KS fittings are used for the construction and repair of plastic pipelines, as well as the execution of irrigation and other piping systems.

Recommendations for your tenders:


- Frischhut brand or equivalent
- Material according to DIN EN 12842
- Corrosion protection through epoxy resin powder coating with BPA-reduced powder

(R8) inside and outside according to quality assurance RAL-GZ 662 – GSK

- Proof of a minimum stock of important components
- At least 2 types of restraining clamps in the standard product range of the chosen brand and on stock for the realization of restrained connections



E-KS
flanged socket

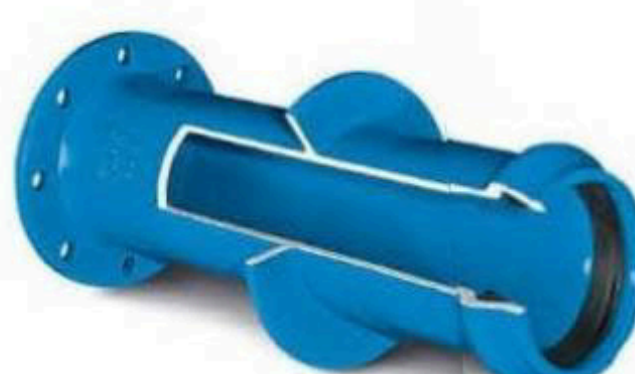

E-KS 600
expansion joint 600 mm long
with puddle flange



EN-KS hydrant duckfoot
bend 90° with optional
bosses



EXI-KS end cap with
internal thread



F-KS flanged
spigot



MMA-KS
double-socket T
with flanged branch



MMB-KS
double-socket T
with socket branch



MMI-KS
double-socket T
with internal
thread



MMK-KS 11° 22° 30° 45°
double-socket bend



MMQ-KS
double-socket elbow



MMR-KS
double-socket reducer



U-KS
double-sliding socket



Frischhut restraining clamp
for PVC and PE pipes



Frischhut restraining clamp
type SL for PVC and PE pipes



MMA-KS
double-socket T with
rotatable flanged branch