


Cuplaje Universale Seria 1200-L "Liberty"



Detalii tehnice

- Fonta ductila, calitate GGG-50.
- Acoperire cu vopsea EPOXY (150 microni).
- Se pot conecta intre diferite tipuri de tevi si diametre diferite.
- Greutatea scazuta si manevrabilitatea acestei game de produse ofera libertate de miscare operatorilor.
- Deflectie unghiulara +/- 6°.

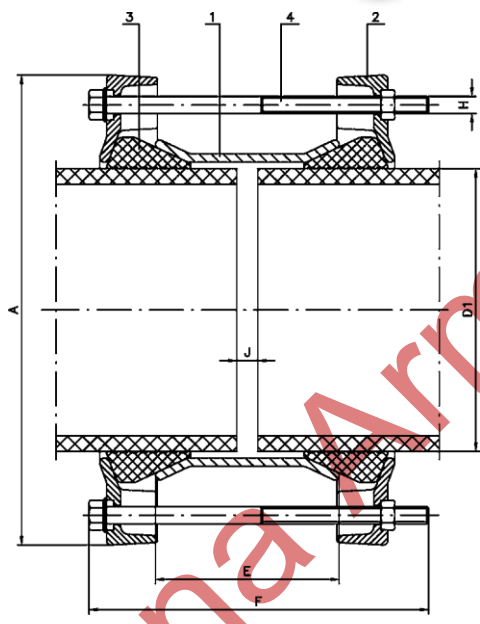

COMPONENTA

	Nume	Material	Acoperire
1	Corp central	GGG-50	EPOXY RAL-5015
2	Mufe de capat	GGG-50	EPOXY RAL-5015
3	Garnitura inchidere	EPDM	
4	Suruburi	Grupa 6.8	GEOMET

EF.	D1 (Min)	D2 (Max)	E	F	A	J (Min)	J (Max)	H	Greutat kg
10-A / L	47	60	100	190	169	10	40	M12 x 180/90	2,8
1200 / L	57	72	106	210	195	10	45	M12 x 200/90	4,1
1201 / L	68	85	106	210	207	10	45	M12 x 200/90	4,4
1202 / L	84	106	106	210	224	10	45	M12 x 200/90	5,1
1203 / L	103	116	106	210	250	10	45	M12 x 200/90	6,7
1204 / L	108	130	106	230	250	10	45	M12 x 220/100	7,1
1205 / L	128	146	106	230	276	10	45	M12 x 220/100	7,7
1206 / L	134	155	106	230	276	10	45	M12 x 220/100	7,6
1207 / L	153	175	106	230	304	10	45	M12 x 220/100	8,6
1208 / L	165	185	106	230	304	10	45	M12 x 220/100	8,1
1209 / L	184	207	130	260	330	10	70	M12 x 250/130	10,7
1210 / L	208	225	130	260	348	10	70	M12 x 250/130	11,3
1210-A / L	218	236	150	260	359	10	90	M12 x 250/130	14,0
1211 / L	222	250	130	260	373	10	70	M12 x 250/130	12,2
1211-A / L	246	270	150	300	394	10	90	M12 x 290/130	17,1
1212 / L	264	284	130	260	407	10	70	M12 x 250/130	17,1
1212-A / L	282	306	150	300	433	10	90	M12 x 290/130	20,0
1213 / L	305	326	130	260	451	10	70	M12 x 250/130	20,5
1213-A / L	315	335	150	300	463	10	90	M12 x 290/130	23,1
1213-B / L	334	355	150	300	483	10	90	M12 x 290/130	22,5
1214 / L	360	386	130	260	510	10	70	M12 x 250/130	23,8
1214-A / L	386	410	150	300	538	10	90	M12 x 290/130	28,1
1215 / L	408	435	130	260	559	10	70	M12 x 250/130	28,0
1216 / L	425	448	150	300	584	10	90	M12 x 290/130	34,1
1216 / LE	438	458	150	300	584	10	90	M12 x 290/130	34,1
1217 / L	465	490	180	330	628	10	120	M12 x 320/130	39,6
1217 / LE	480	500	180	330	628	10	120	M12 x 320/130	39,6

MATERIAL: GGG-50

Utilizare: Fonta, otel, PVC-U / -BO, azbociment.