



GULLY GRATING AND FRAME

Class D400
EN124-2 : 2015
SG Iron 500-7
ISO 1083 / EN1563

GD4541A DEE

FLAT GRATING

DESIGN FEATURES :


- **Material(s) :**
SG Iron 500-7
ISO 1083 / EN1563
- **Design load :**
400 kN to EN 124. Group 4 installation area :
carriageway of roads (including pedestrian
streets), hard shoulders and parking areas,
for all types of roads vehicles (and lower
groups).
- **Coating :**
Non toxic waterbased black paint.
- **Product Certification :**
KITEMARK

SPECIAL FEATURES :

- **Mass :**
Grating : 16,2 kg.
Product total : 33,43 kg.
- **Waterway :**
Grating waterway : 1040 cm²
- **Frame bearing pressure :**
 $p \leq 7.5 \text{ N/mm}^2$.
- **Securing of cover/grating within frame :**
V seatings with wedging
- **Frame type :**
Depth : 102 mm
Rectangular monoblock as cast.
- **Hinge :**
Captive hinged flat grating with a hinge axis
parallel to the footway.
Opening angle $\approx 120^\circ$.
- **Remark(s) :**
 - A : Direction of travel
 - B : Sidewalk

OPTION(S) :

Badging available please enquire

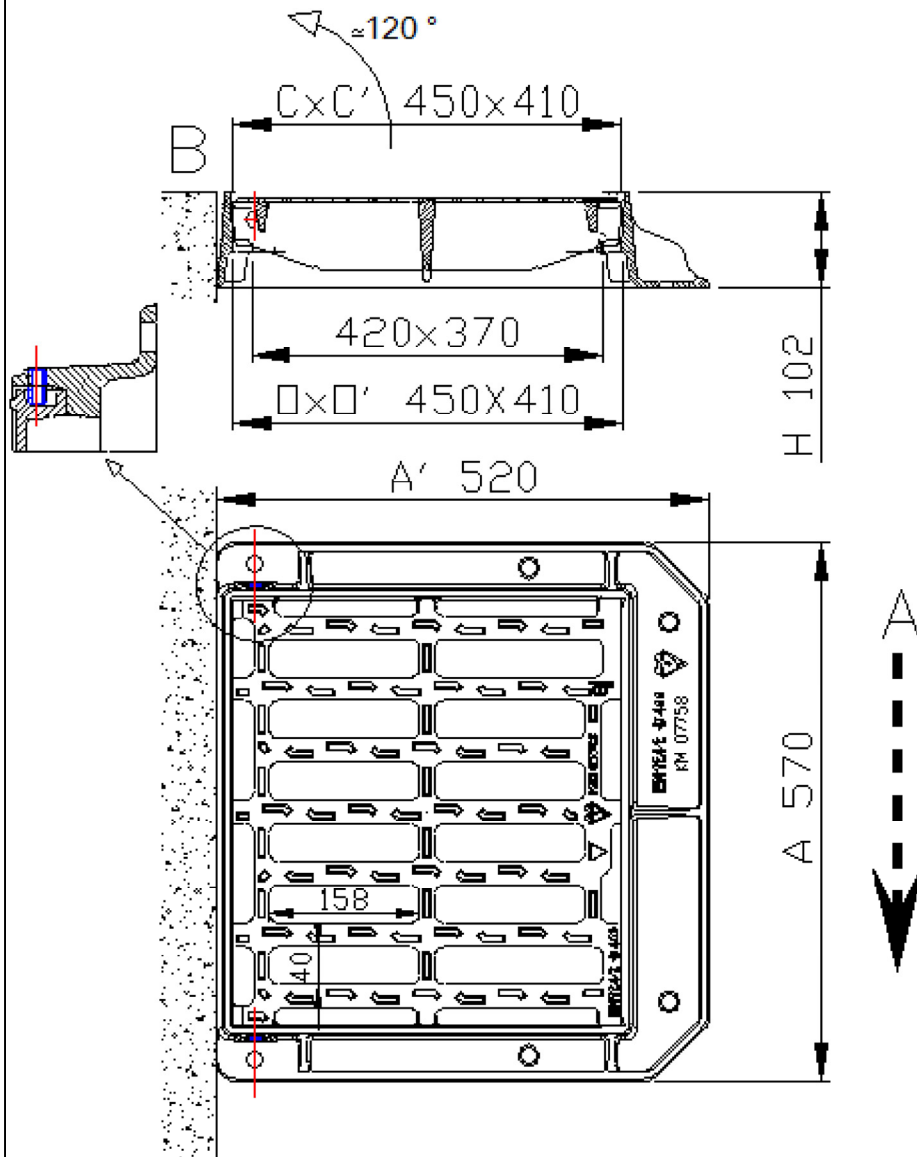

- Weights (kg), dimensions (mm), and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
ZI De Marivaux | Saint-Crépin Ibouvillers |
BP50409 | 60544 Méru Cedex | France

ISO 9001 - ISO 14001 - ISO 45001 - ISO 50001

ejco.com

Data sheet :
FT_522854
Date updated :
01.03.2021
Printed : 02.03.2021